


UPPER TERMINAL SLOT

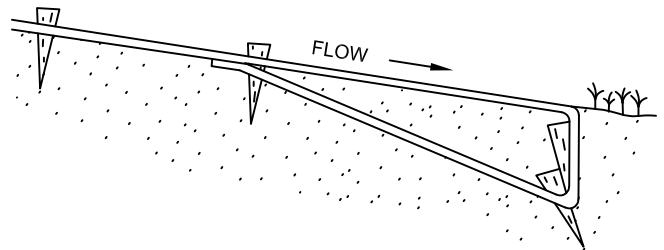

LOWER TERMINAL SLOT

NOTES

1. INSTALL SOIL RETENTION BLANKETS (SERB'S) BEGINNING AT THE DOWNSTREAM END AND PROCEED UPSTREAM.
2. THE LOCATION, SPACING AND CONFIGURATION OF UPPER AND LOWER TERMINAL SLOTS, CHECK SLOTS, ETC. MAY VARY FOR EACH CLASS AND TYPE OF SERB ACCORDING TO THE MANUFACTURER'S RECOMMENDATIONS. FIRMLY TAMP TOPSOIL BACKFILL INTO ALL TERMINAL SLOTS.
3. SERB EDGES ALONG THE TOP SLOPE OR TOE OF SLOPE SHALL BE ANCHORED AS PER MANUFACTURER'S RECOMMENDATIONS.
4. THE "U" SHAPED WIRE STAPLES ARE TO BE INSTALLED AT 90° TO THE SLOPE PLANE. IF WIRE STAPLES PROVE TO BE AN UNSATISFACTORY METHOD OF SECURING THE SERB IN AREAS OF ROCK, RAILROAD SPIKES OR 60 PENNY NAILS MAY BE SUBSTITUTED WITH APPROVAL OF THE ENGINEER.
5. WIRE STAPLES SHALL BE MADE FROM NOT LESS THAN 13" LENGTHS OF NO. 11 WIRE BENT TO FORM A "U" APPROXIMATELY 1" IN WIDTH.
6. WOOD STAKES SHALL BE A MINIMUM LENGTH OF 10". WOOD DIAGONAL STAKES MAY BE USED.
7. IMMEDIATELY AFTER THE SERB HAS BEEN SECURED TO THE GROUND, THE AREA COVERED SHALL BE SPRINKLED AND ROLLED WITH A LIGHT ROLLER OF SUFFICIENT WEIGHT TO PRESS THE BLANKET INTO THE SURFACE OF THE SOIL. THE ROLLER SHALL BE OF SUCH WEIGHT TO AVOID OVER-COMPACTION OF THE SEEDBED.
8. FOLLOW MANUFACTURERS SPECIFICATIONS FOR INSTALLMENT.
9. REFER TO COSM SPECIFICATION 605S FOR ADDITIONAL DETAILS.
10. SOD MAY BE USED IN LIEU OF SOIL RETENTION BLANKETS FOR SLOPE LESS THAN 4H:1V.

The City of San Marcos Engineering and Capital Improvements		CURRENT AS OF 1/1/2022	SOIL RETENTION BLANKET	
RECORD COPY SIGNED BY	1/1/2021	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.		STANDARD NO. 605S-1-SM
Laurie Moyer, P.E.	ADOPTED			1 OF 1