



City of San Marcos

630 East Hopkins
San Marcos, TX 78666

Workshop Agenda - Final City Council

Monday, February 22, 2016

5:30 PM

City Council Chambers

630 E. Hopkins - Capes Dam Workshop

I. Call To Order

II. Roll Call

1. Receive a presentation from Dr. Thom Hardy concerning the possible removal or repair of the Capes Dam for recreation and environmental purposes and the implications for the Mill Race; and provide direction to Staff.

III. Question and Answer Session with Press and Public.

IV. Adjournment.

POSTED ON FRIDAY, FEBRUARY 19, 2016 @ 1:45 p.m.

JAMIE LEE PETTIJOHN, CITY CLERK

Notice of Assistance at the Public Meetings

The City of San Marcos does not discriminate on the basis of disability in the admission or access to its services, programs, or activities. Individuals who require auxiliary aids and services for this meeting should contact the City of San Marcos ADA Coordinator at 512-393-8000 (voice) or call Texas Relay Service (TRS) by dialing 7-1-1. Requests can also be faxed to 855-461-6674 or sent by e-mail to ADArequest@sanmarcostx.gov



City of San Marcos

630 East Hopkins
San Marcos, TX 78666

Legislation Text

File #: ID#16-104, **Version:** 1

AGENDA CAPTION:

Receive a presentation from Dr. Thom Hardy concerning the possible removal or repair of the Capes Dam for recreation and environmental purposes and the implications for the Mill Race; and provide direction to Staff.

Meeting date: February 22, 2016

Department: Community Services - Parks and Recreation Division

Funds Required: N/A

Account Number: N/A

Funds Available: N/A

Account Name: N/A

CITY COUNCIL GOAL: N/A

COMPREHENSIVE PLAN ELEMENT(s): N/A

BACKGROUND:

On September 5, 2015 the City Council was slated to receive this presentation from Dr. Hardy. At the meeting the Council postponed the presentation to its own workshop. Due to the October flood this is the first opportunity Staff has had to bring back the item as directed.

Dr. Thomas Hardy

Dr. Rolan Raphelt

Evaluation of Capes Dam

A bit of Ecology




TABLE 4-10
LONG-TERM BIOLOGICAL GOAL FOR TEXAS WILD-RICE

River Segment	Areal Coverage (m ²)	Reach Percentage of Total Areal Coverage
Spring Lake	1,000 – 1,500	n/a
Spring Lake Dam to Rio Vista Dam	5,810 – 9,245	83 – 66
Rio Vista Dam to IH-35	910 – 1,650	13 – 12
Downstream of IH-35	280 – 3,055	4 – 22
TOTAL	8000 – 15,450	100

Adaptive Hydraulics Modeling

- ADH is a state-of-the-art Adaptive Hydraulics Modeling system developed by the Coastal and Hydraulics Laboratory, ERDC (ENGINEER RESEARCH AND DEVELOPMENT CENTER), USACE
- Capable of handling three-dimensional Navier-Stokes flow, and two- or three-dimensional shallow water problems.
- One of the major benefits of ADH is its use of adaptive numerical meshes that can be employed to improve model accuracy without sacrificing efficiency.
- ADH contains other essential features such as completely coupled sediment transport.

Grid Resolution Results...

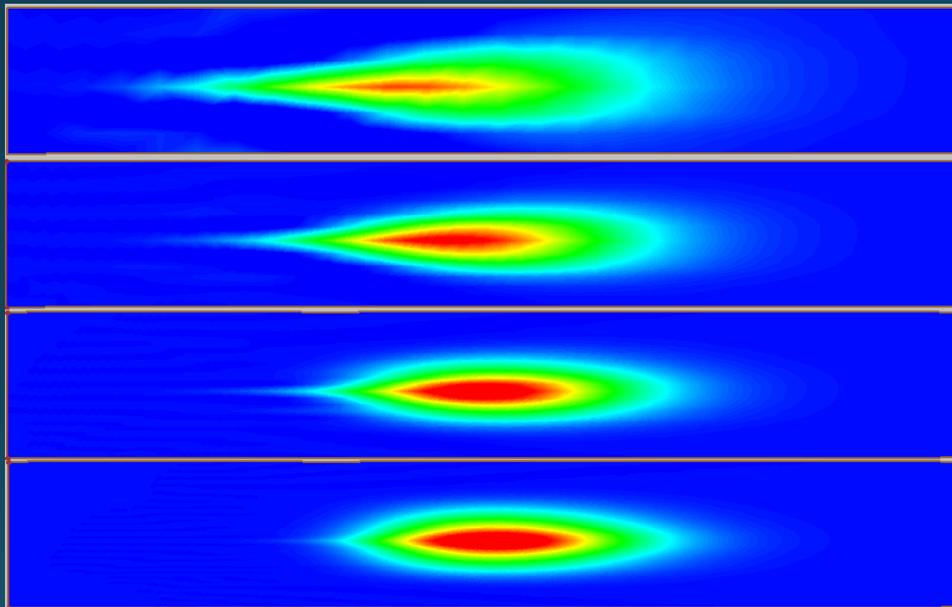

Coarse


Refined #1

Refined #2

Refined #3


at timestep = 380 seconds

Adaption - Concentration Cloud

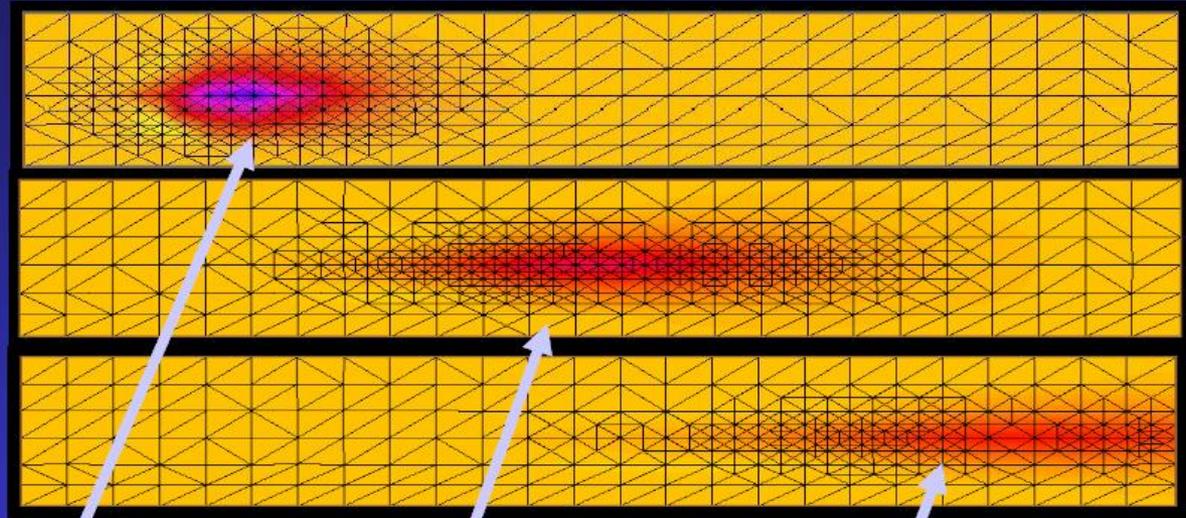

Mesh refines and unrefines to resolve the concentration cloud as it progresses along the flume

Modeled Stretch of River

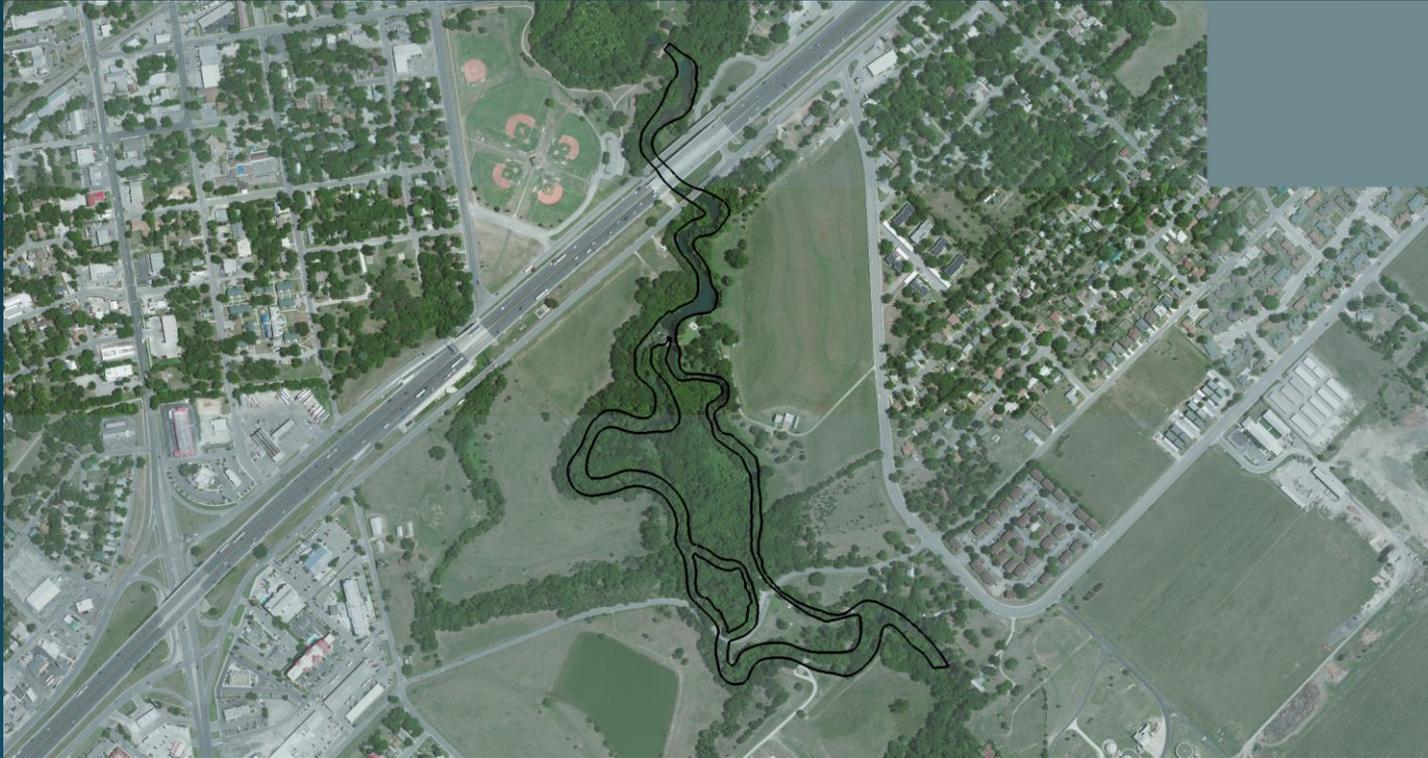


Rio Vista was not included because under most flow regimes the backwater affects from Cape's Dam stop downstream




A

Mesh Module elevation



Approximately 3000 field measurements of x,y,z and substrate/vegetation per 100 meters of river length

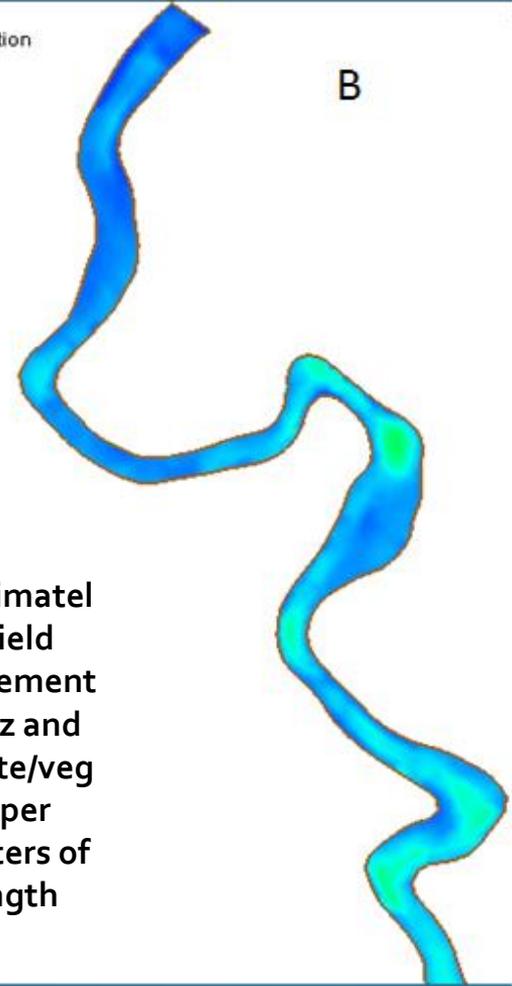


B

Materials Legend



42296 elements and 22492 nodes

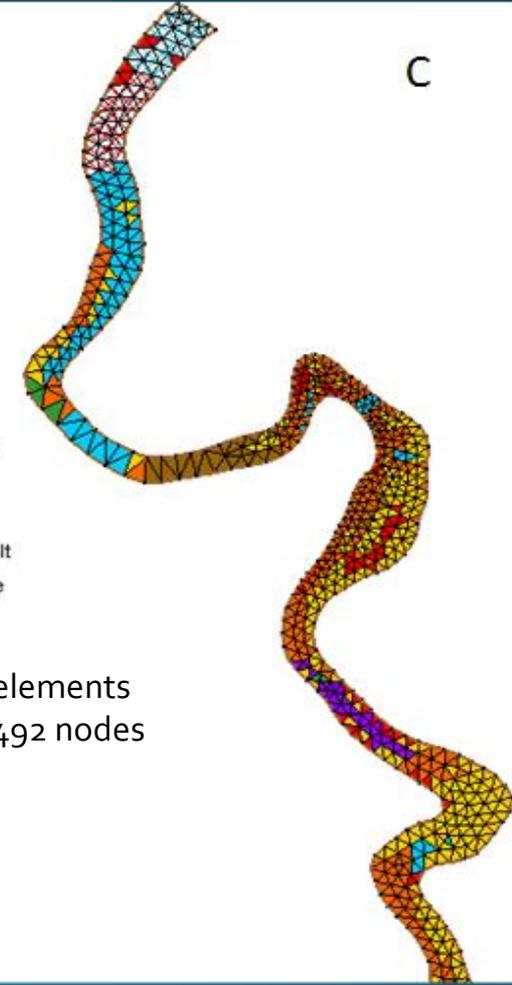


C


Depth of Sediment

The reservoir deposits were probed at 100 locations along 10 transects to assess potential sediment storage behind Capes Dam, which would be available for mobilization following dam removal.


The volume of soft sediment stored that could potentially be mobilized in Capes reservoir is estimated at 6,762 m³. This is considered a minimum estimate. (Paul Hudson, UofT.)

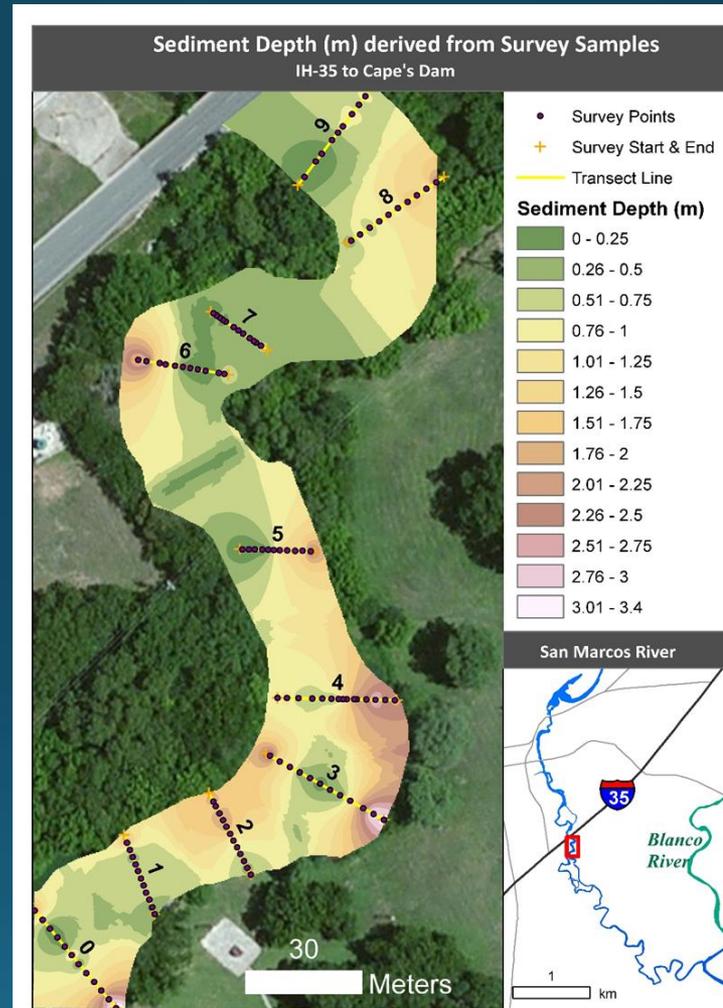


Transect 0 - Immediately upstream of Cape's Dam

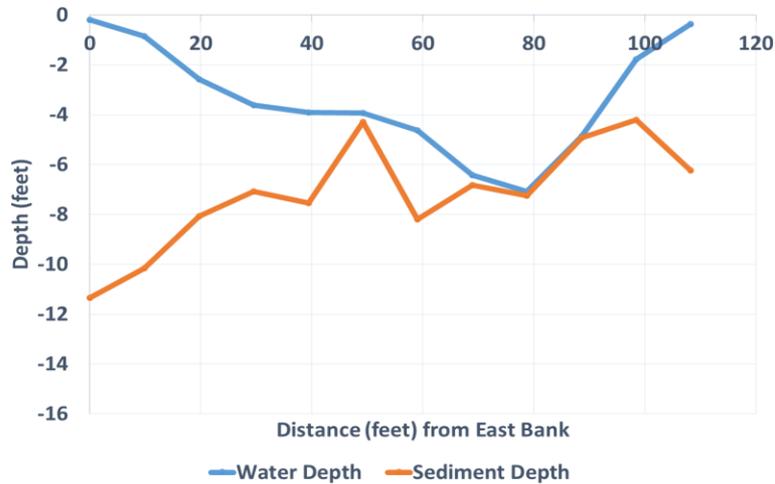


Transect 4 - ~ 300 feet upstream of Cape's Dam

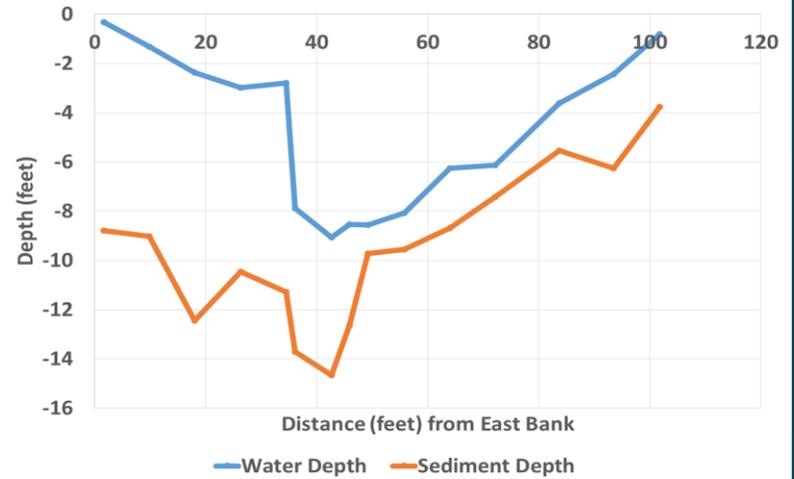


Transect 6 - ~ 600 feet upstream of Cape's Dam

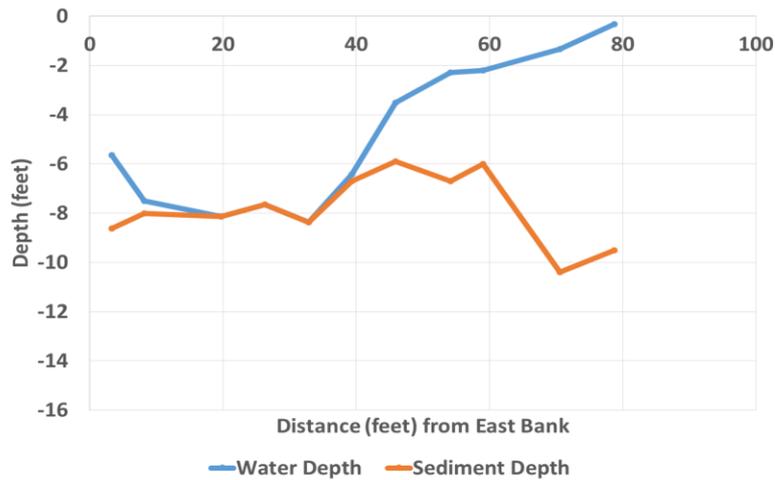

Transect 8 - ~ 900 feet upstream of Cape's Dam

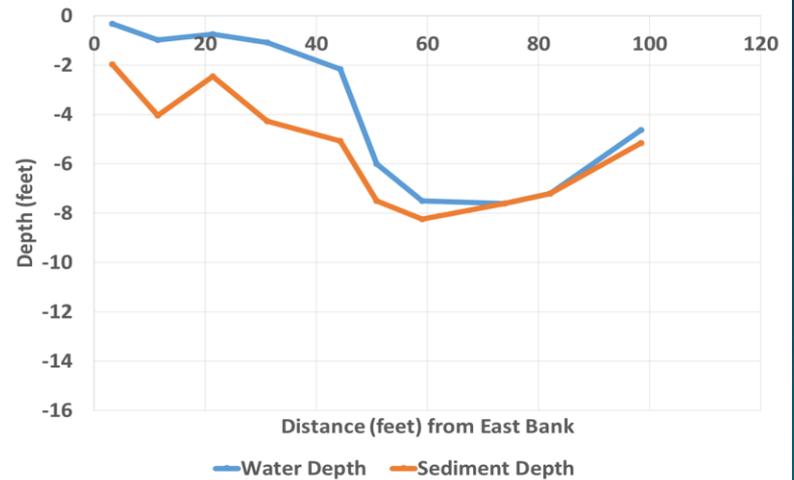

San Marcos River at San Marcos, TX

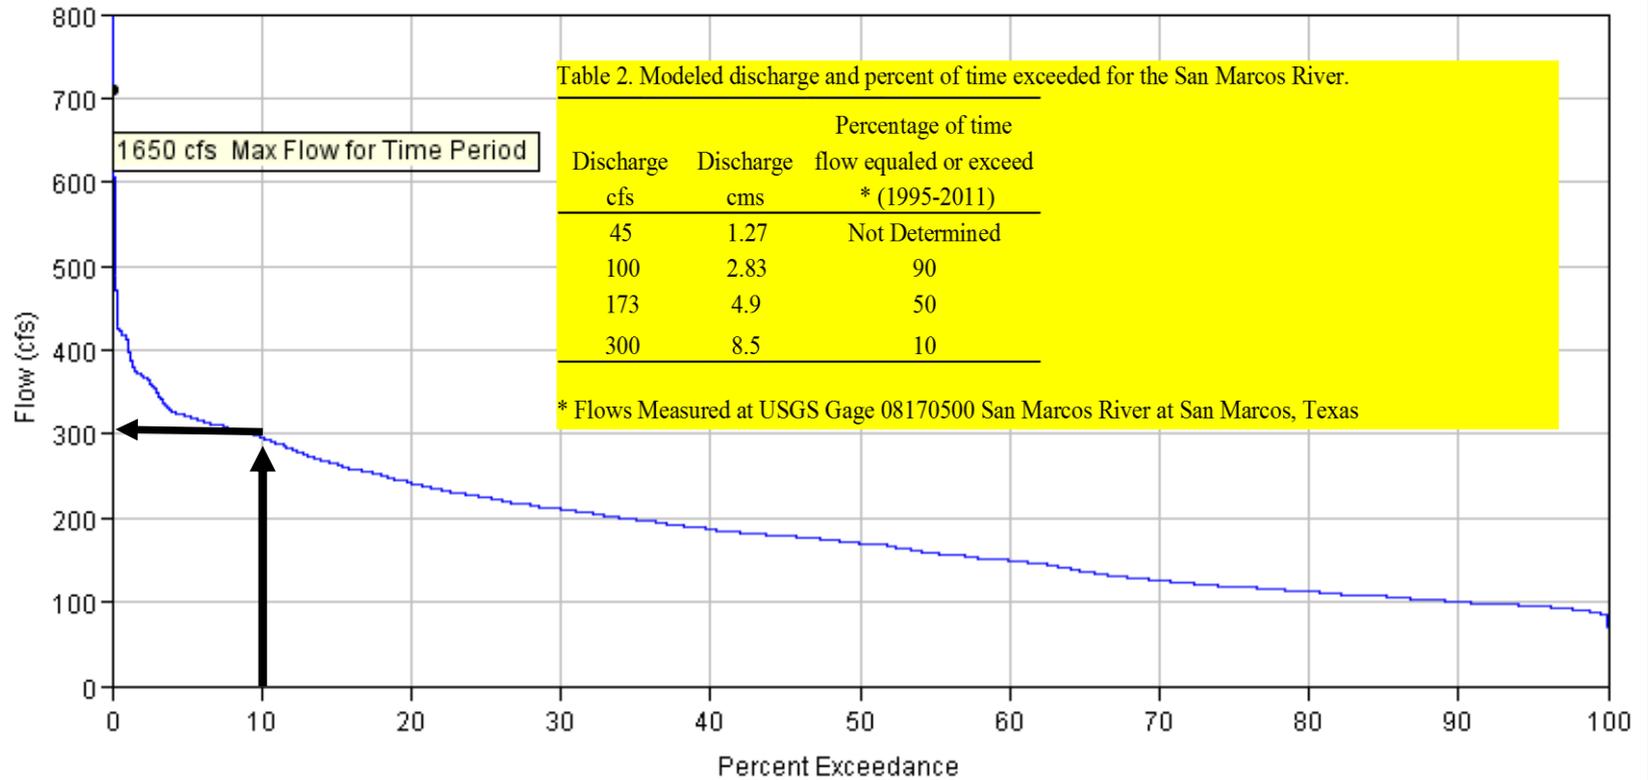


Flow Duration 08 Oct 1996 - 07 Mar 2015 USGS 15 Minute Data

ADH Modeling


Bed Evolution was evaluated by running 300 cfs for 30 days

Runs were completed on a 64 node parallel processor and execution times were approximately 23 hours per simulation run to reach convergence at a given discharge


Existing (~full height) Bed Elevation Conditions

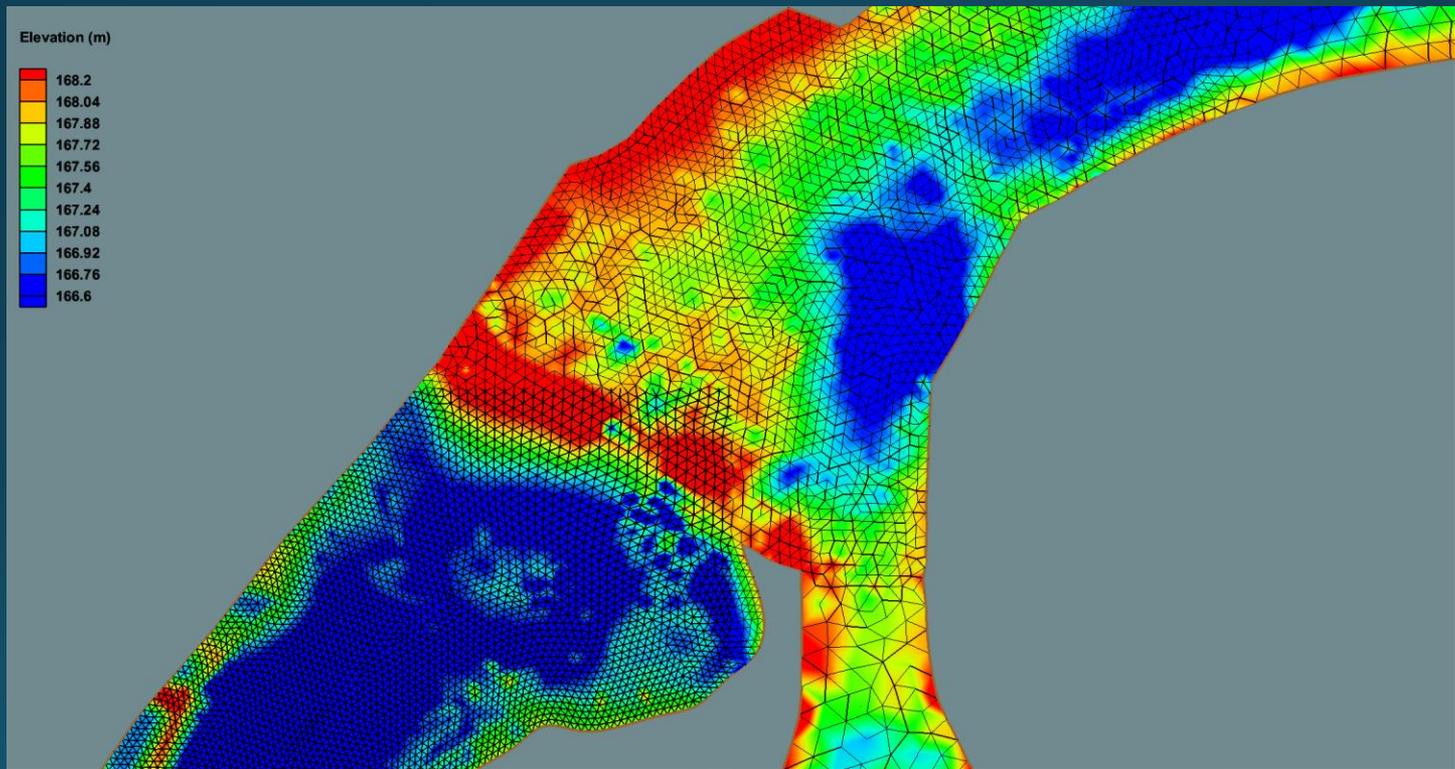


Assumed Half Height Elevations

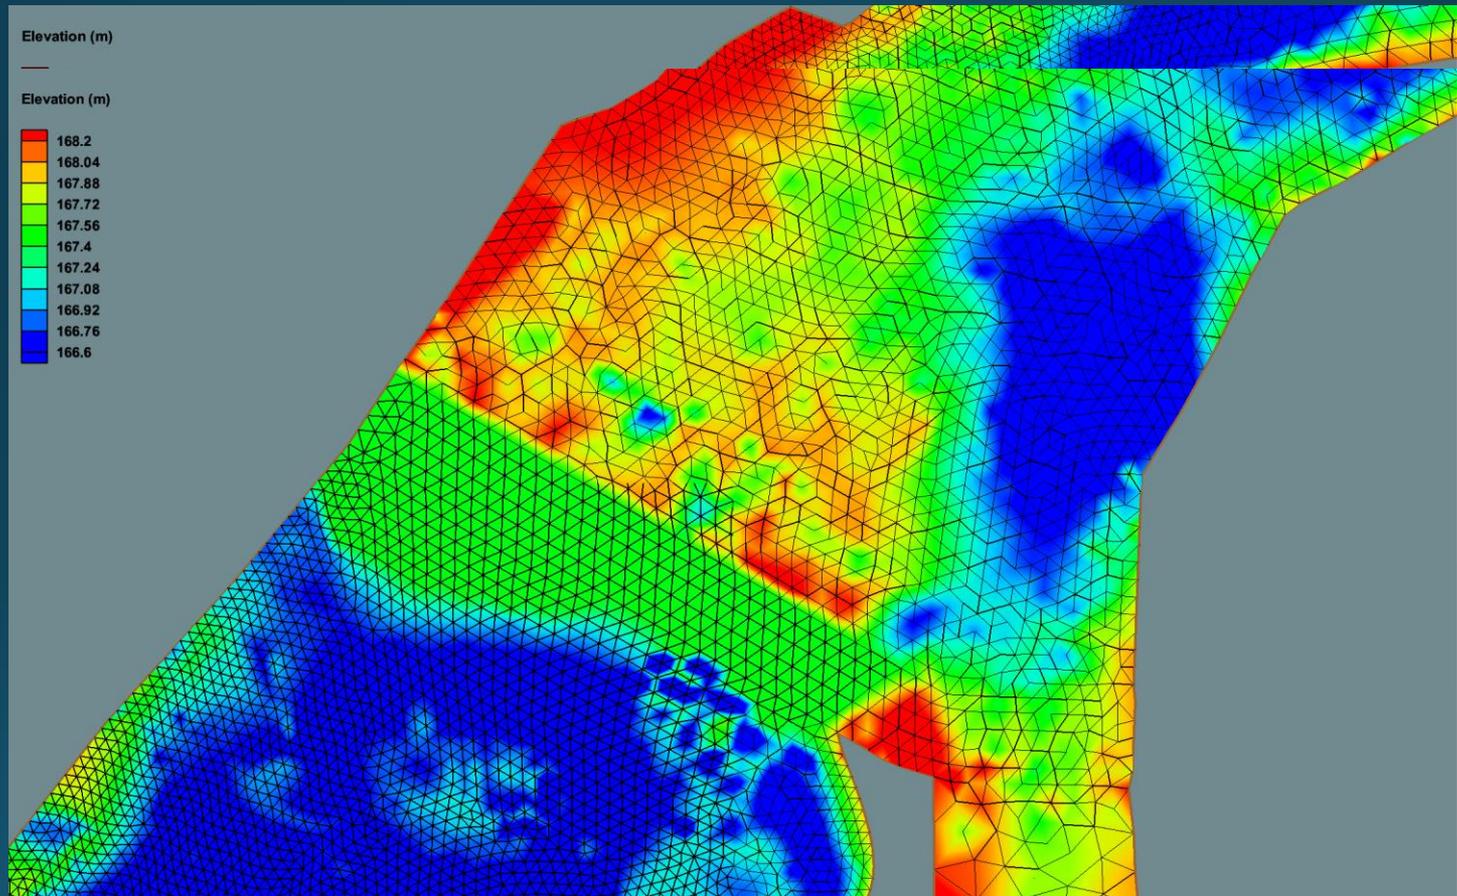


Assumed Full Dam Removal Elevations

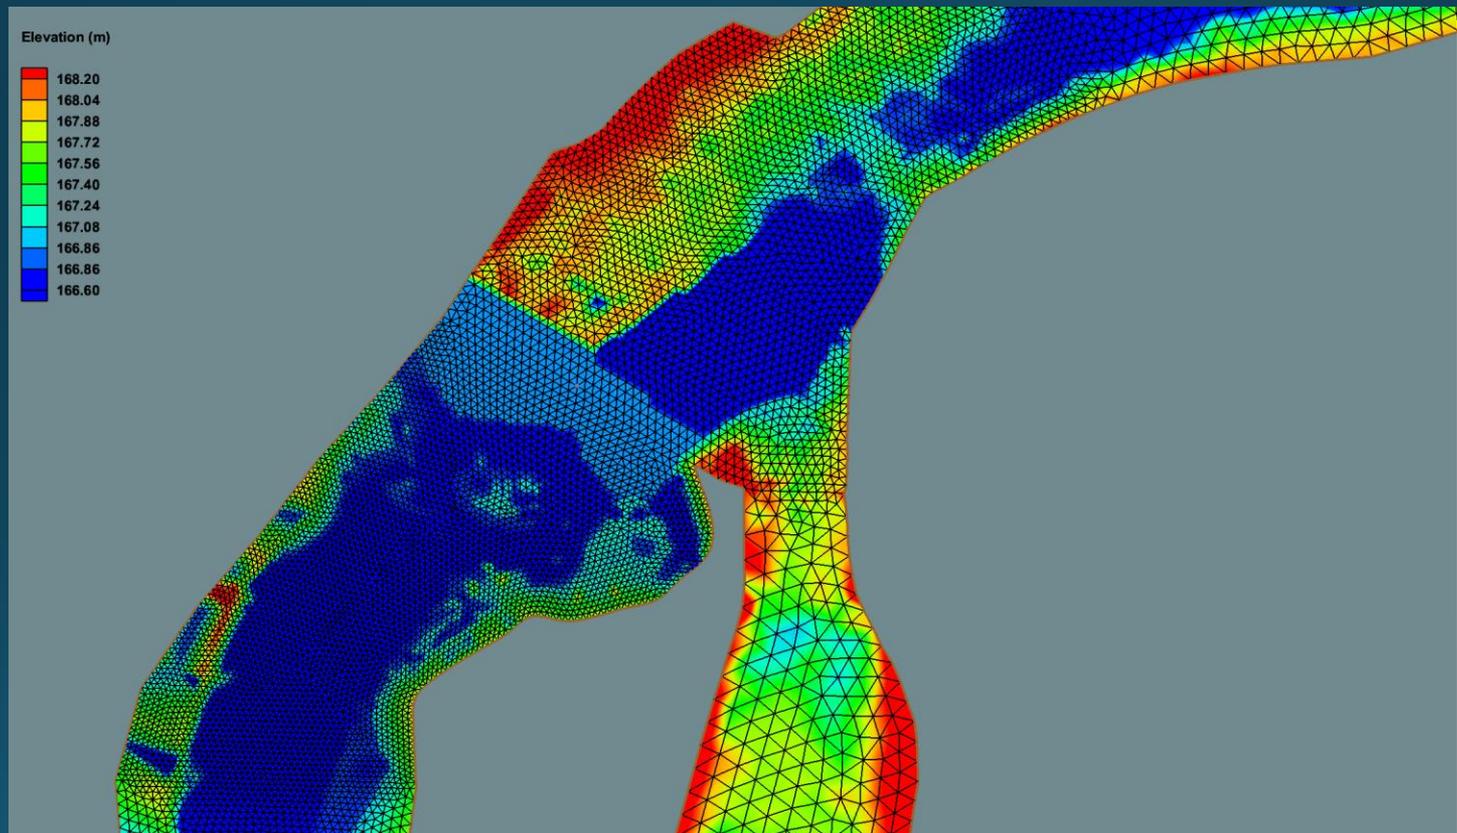


DEPTH

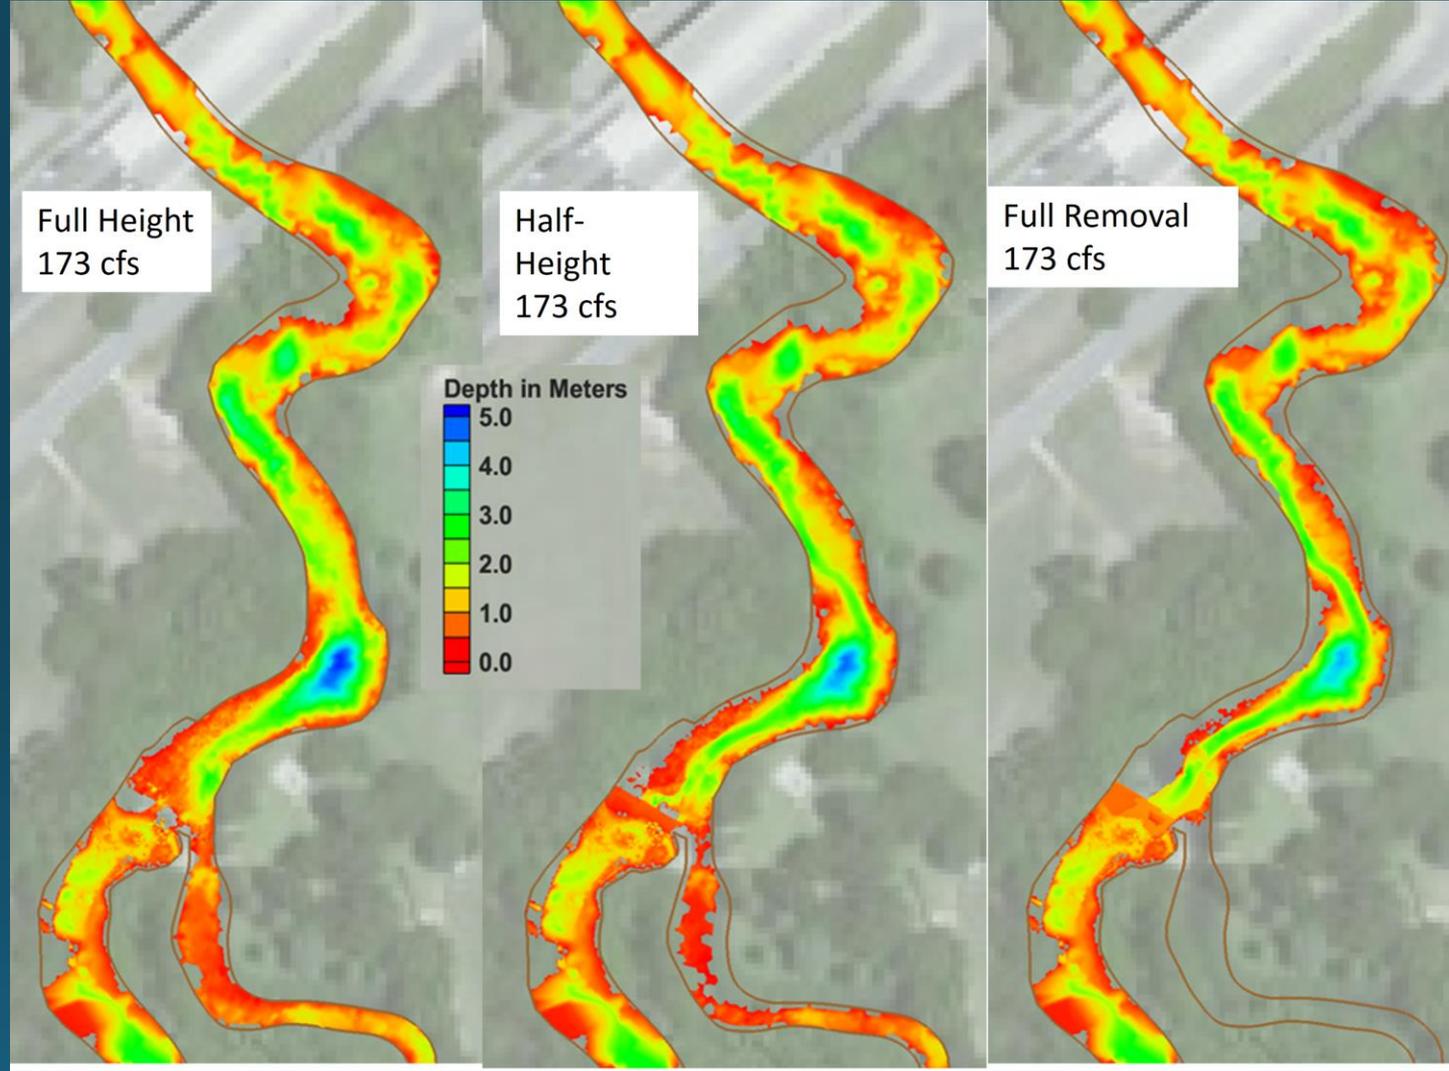

DEPTH

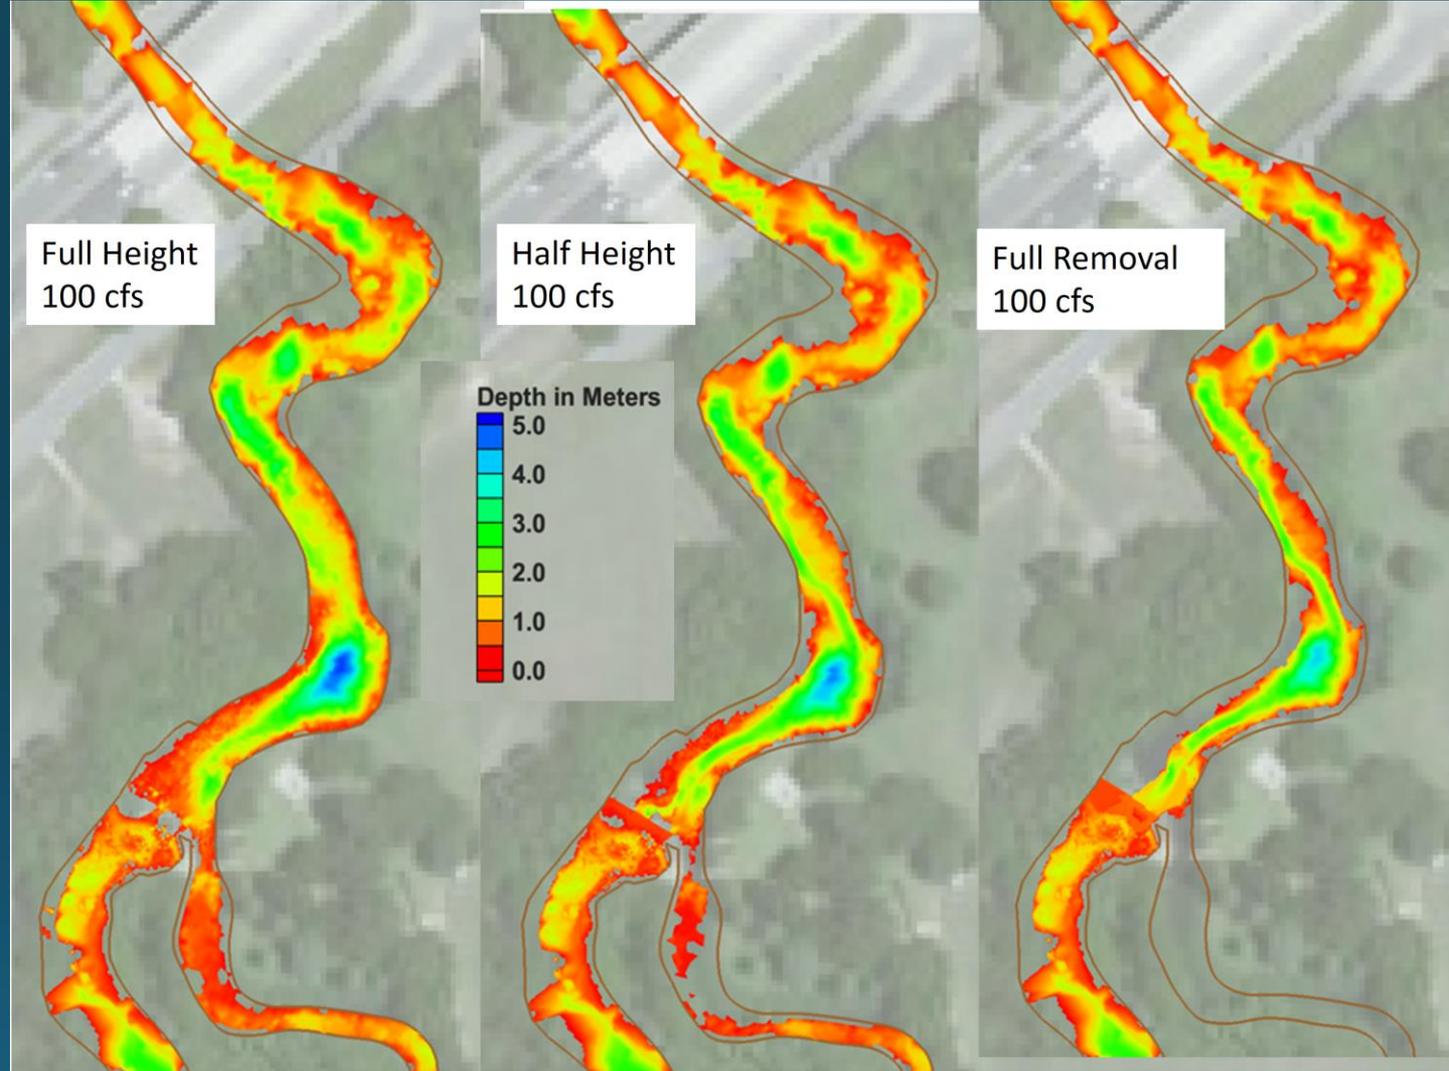


DEPTH

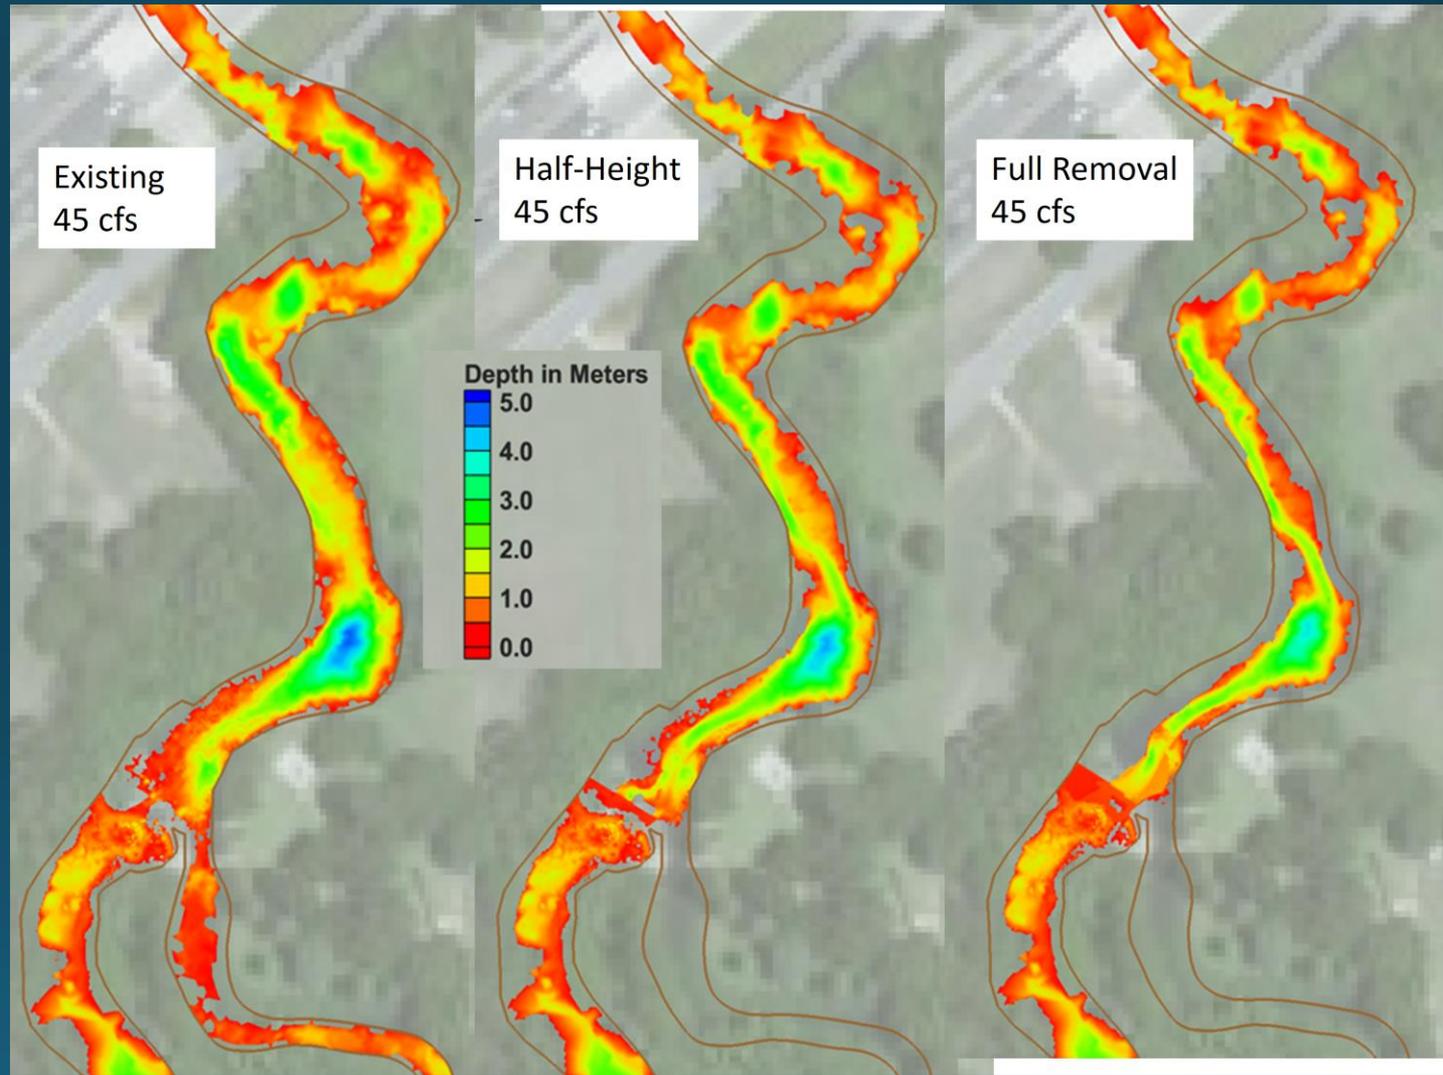


Key Conclusions

- *Channel Changes*
- **Removal of Cape's Dam will result in reestablishment of normal depths equivalent to depths currently observed upstream of the backwater section and the channel below the confluence with the Mill Race return flows.**
- **Removal of Capes Dam will restore natural fish and other aquatic organism passage.**

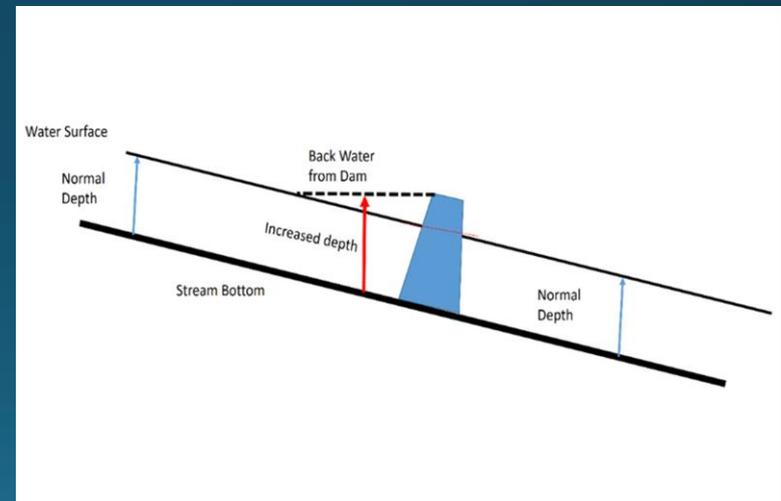


Bottom Elevation Difference



This Plot shows the difference in Channel bed elevations after a 30 day run for existing conditions and Full Dam Removal. Negative numbers indicated where dam removal cause Scour, positive number indicated where dam removal cause sediment deposition. Changes +/- .1 meter are consider computation noise and are not on figure.


Full Removal
Changes in
Channel
Depth

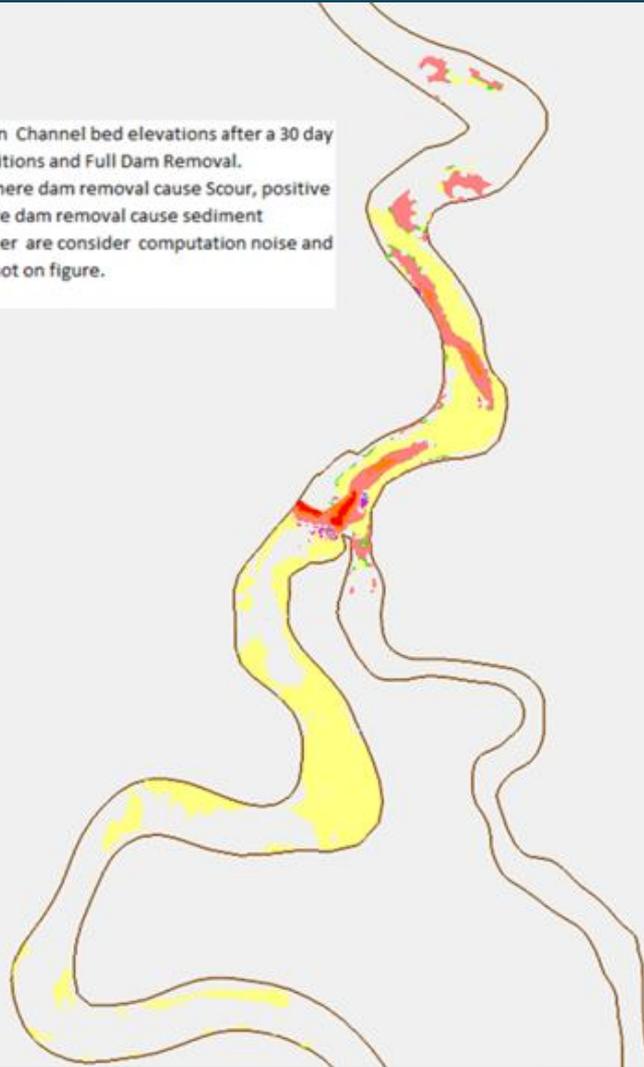

GEOMORPHIC MONITORING OF THE UPPER SAN MARCOS RIVER, TEXAS TO
ASSESS CHANNEL ADJUSTMENT IN RESPONSE TO REMOVAL OF AN INVASIVE
EXOTIC WATER PLANT, *CRYPTOCORYNE BECKETTII*

CONTRACT NO. 05-222-GM

FINAL REPORT

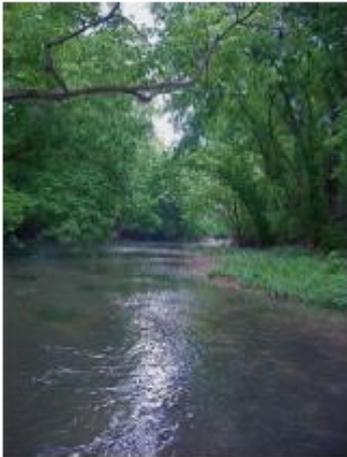

Submitted to Texas Parks and Wildlife

March 12, 2012


Paul F. Hudson, Ph.D.
Department of Geography and the Environment




University of Texas at Austin

Additionally, bank erosion rates were 1.8 inches per year along the channel, and did not spatially vary. The cohesive (clayey) bank material likely represents an inherent geomorphic buffer along the San Marcos River, thereby reducing the rivers sensitivity to erosion.

Mill Race

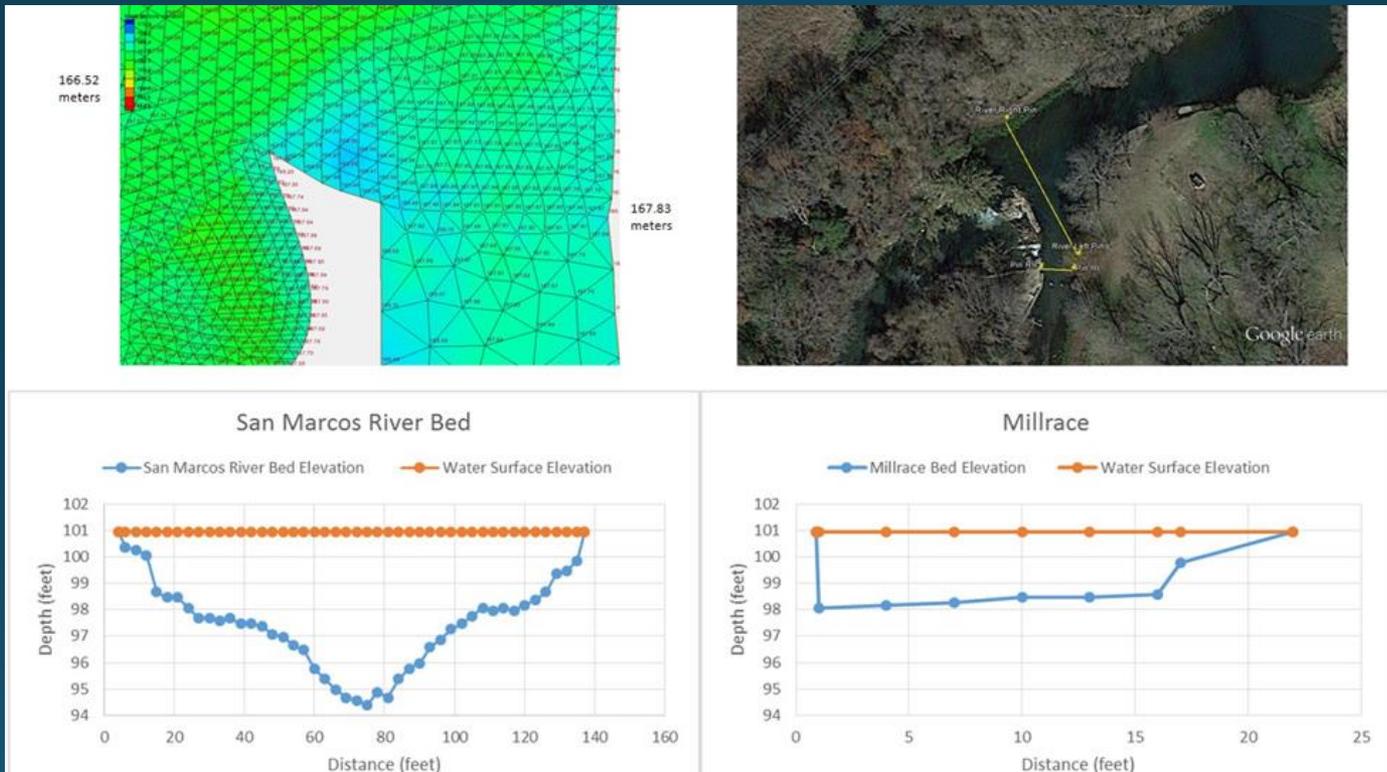

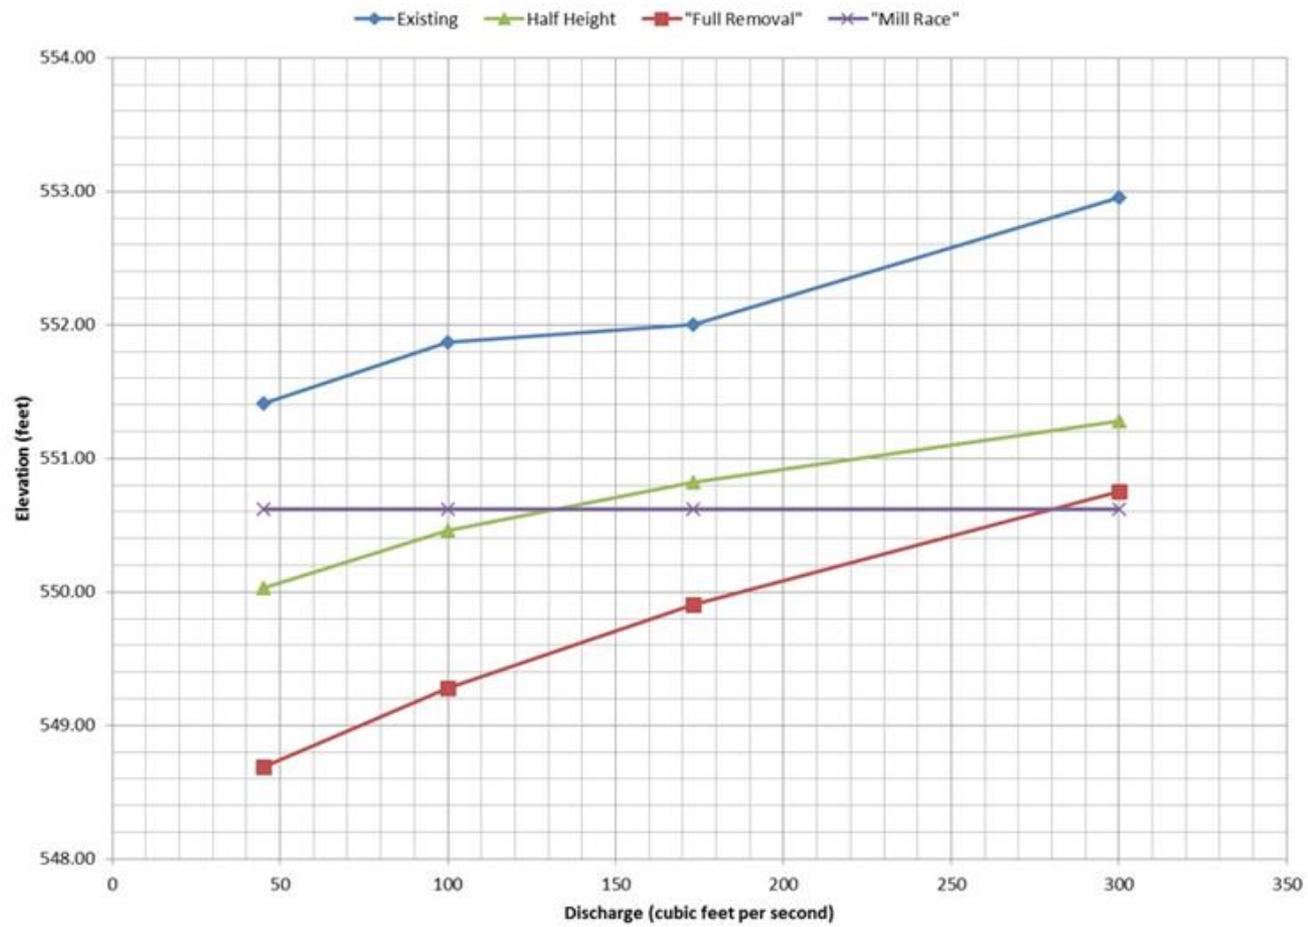

Key Conclusions



- Implications on Flows in the Mill Race

-

- **Reduction in Cape's Dam to half height will result in a reduction of the amount of time that flows will enter the Mill Race. Under full removal flows will only occur at flow rates equaled or exceeded about 10-15 percent of the time.**
- **Diversion of flows into the Mill Race will continue to reduce the quantity and quality of aquatic habitats in the main stem San Marcos River which are already stressed during low-flow periods.**

Key Conclusions


- *Texas Wild Rice*
- **Removal of Cape's Dam represents the best ecological benefits to improving habitat for Texas wild rice.**

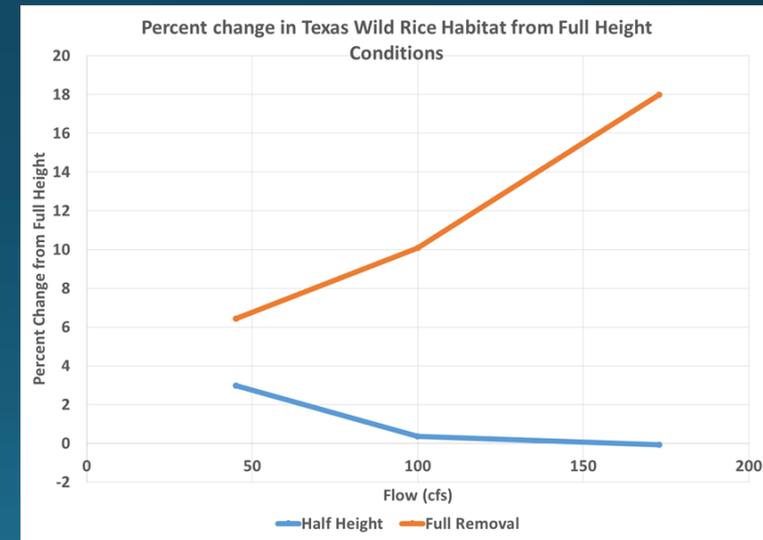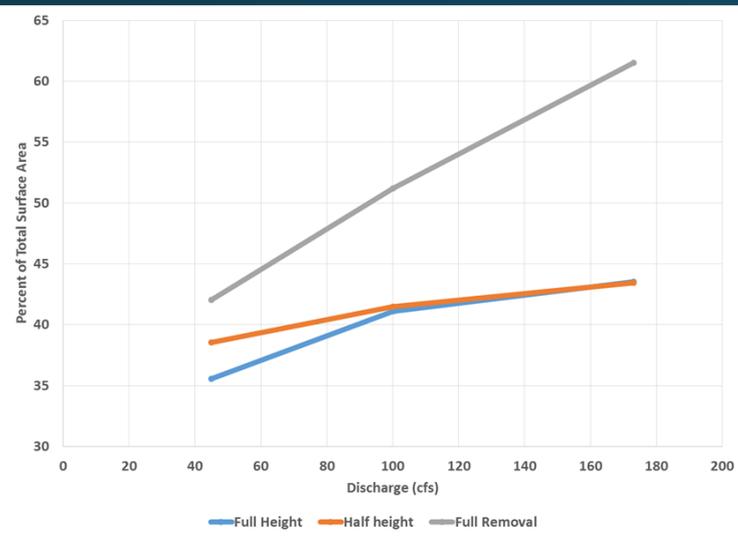

Key Conclusions

- Photosynthetically Active Radiation (PAR)

- The decrease in depths within the existing backwater section of the river with removal of Cape's Dam will result in an increase in available PAR reaching the stream bottom which will promote increased TWR and other aquatic macrophyte growth in this section of the river.

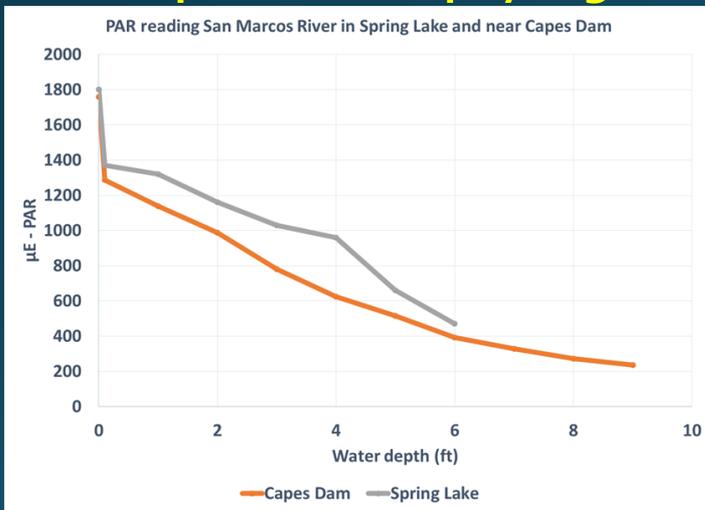

Species	San Marcos River Reach					Total
	Sewell Park	Above City Park	City Park	Purgatory Creek	Cypress Island-Rio vista	
Ludwigia repens	2,657	2,393	6,461	-	768	12,279
Heteranthera dubia	622	475	2,169	-	2,544	5,810
Zizania texana	1,886	4,269	16,140	384	7,752	30,431
Sagittaria	673	1,560	1,121	133	305	3,792
Potamogeton	55	124	54	-	-	233
Hydrocotyle	-	42	-	-	-	42

Key Conclusions

- *Velocity and Gas Exchange Dynamics in Aquatic Plants*
 - Increased distribution of higher velocities in the backwater section of the river with dam removal will promote higher growth rates of TWR and other aquatic macrophytes.

Increased water velocities at the leaf surface have been shown to increase the photosynthetic rates in several aquatic macrophytes due to reduction in the thickness of the DBL (Black et al., 1981). Powers (1996) demonstrated that for TWR the stem density was greater in fast flowing water (0.40-0.49 m/s) than in either moderate (0.12-0.24 m/s) or slow flowing (0.05-0.12 m/s) water. Hardy et al. (2015) harvested thousands of free floating TWR tillers from the San Marcos River and showed > 90% success rate for propagation of TWR exposed to moderate velocities.

Key Conclusions


- Implications on Reproduction and Genetic Integrity
 - Reduction of depths with removal of Cape's Dam will provide an increase in areas suitable for sexual reproduction of TWR important for maintenance of genetic integrity of the population



Key Conclusions

- Habitat Quantity

- Removal of Cape's Dam will provide an increase in the area of fountain darter habitat due to both improved hydraulic conditions (i.e., depth and velocity) as well as aquatic macroinvertebrates.

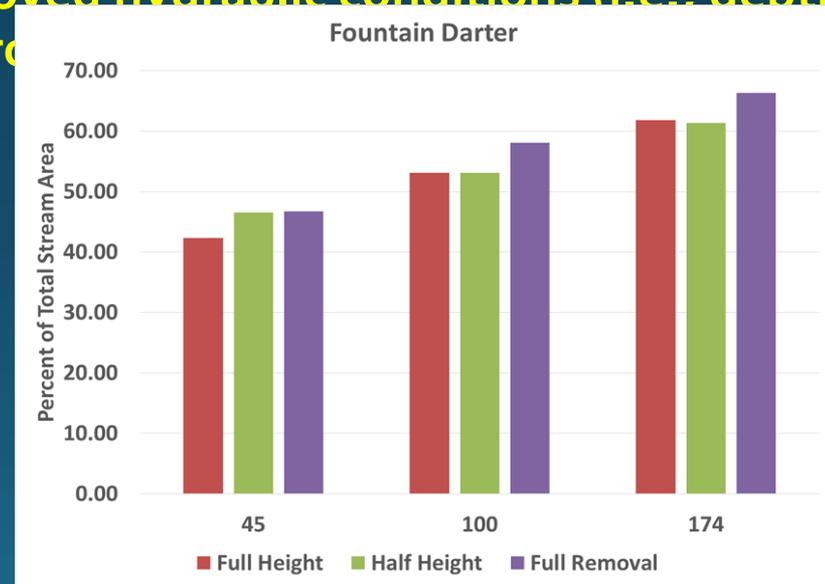


Key Conclusions


- Habitat Quality

- **Removal of Cape's Dam will provide an increase in the quality of fountain darter habitat over all flow ranges compared to full height or half height dam scenarios.**


173 cfs

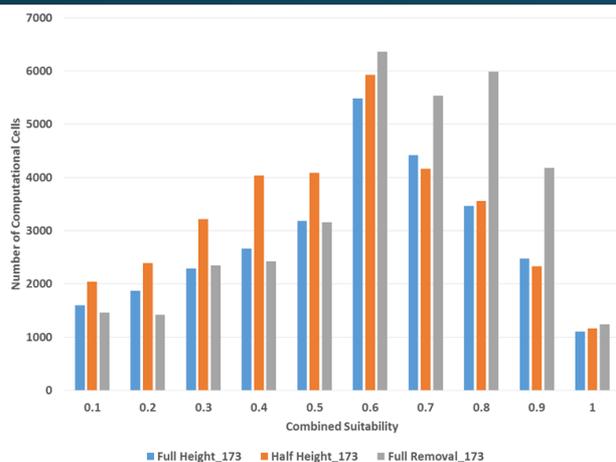

100 cfs

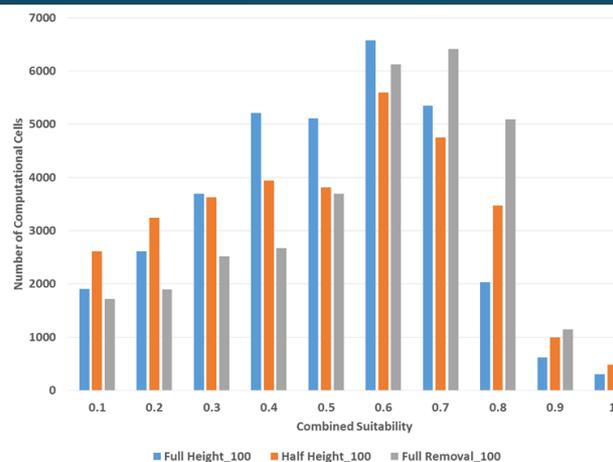

45 cfs

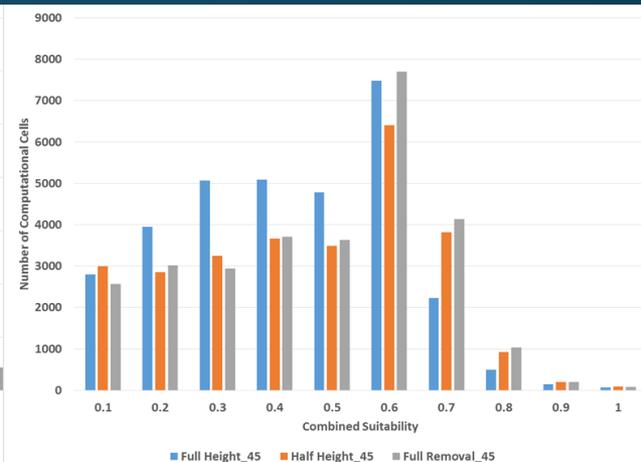

Key Conclusions


- *Impacts of Low Head Dams*

- Removal of Cape's Dam will eliminate known ecological impacts associated with low head dams such as adversely affecting warmwater stream fish, aquatic macroinvertebrates, and aquatic/riparian plants by blocking migration pathways, degrading habitat and water quality, and fragmenting the river landscape, which results in a loss of native species diversity.
- Backwaters from Low Head Dams are known to encourage the proliferation of introduced aquatic plant and fish species which are detrimental to the native flora and fauna within the San Marcos River. Introduced fish directly compete for space and food resources and are known predators of many native larval fish.
- Low head dams can impact the height of flood waters

Key Conclusions

- *Recreation*

- **Removal of Cape's Dam will provide a safe and sustainable recreation corridor that will accommodate, swimming, tubing, canoeing, kayaking and paddle boarding without a demonstrable negative impact relative to full height or half height dam scenarios for these water based recreation activities.**

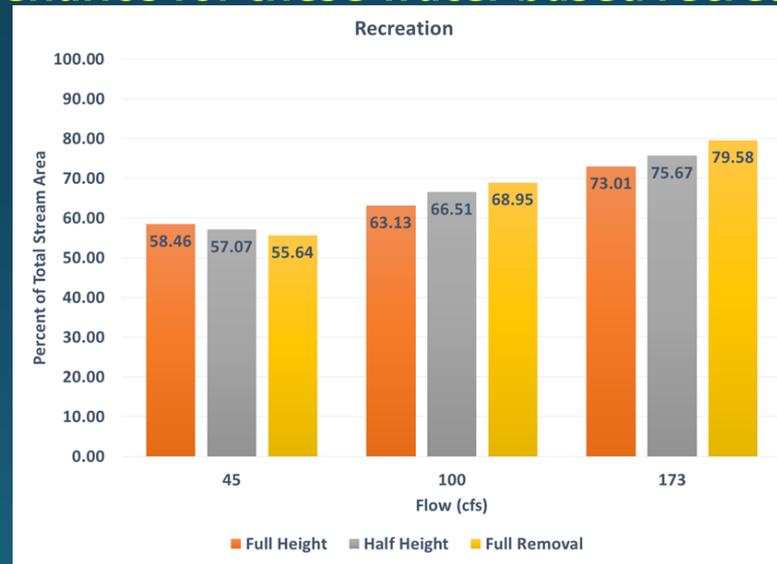

Summary

- Dam removal represents the best “cost/benefit” environmentally
- Removal results in increases in both fountain darter and Texas wild rice habitat and does not negatively impact opportunities for contact recreation
- Dam removal will not functionally impact recreation at flow levels that are equaled or exceeded over 90 percent of the time
- Simulations support that dam removal will result in improved aquatic vegetation production with concomitant increases in the endangered fountain darter (and other aquatic organisms) habitat
- Existing empirical data from this section of river clearly shows very little potential for bank erosion or lateral migration if the dam were removed
- Multi-Year monitoring of channel changes after dredging in this reach showed no evidence of head-cuts

Summary

- Under existing conditions that Capes Dam backs up the water surface elevation and flows enter the Mill Race over a wide range of discharges.
- Under half-height conditions, where the height of the water backed up behind Capes Dam would be lower, that water would enter the Mill Race when the San Marcos River discharge is approximately 130 cfs. This flow rate is equaled or exceeded approximately 53 percent of the time.
- Under full dam removal, water would enter the Mill Race when San Marcos flows are greater than about 280 cfs. This average daily flow rate is equaled or exceeded only about 10-13 percent of the time over the indicated period of record.